



LED Waterproof EP Series

Features

- Compact and durable
- IP65 protection rating
- 3 length & 2 wiring options

Benefits

- Dedicated housing for LED T8 tube
- Water and dust proof, suitable for wet and dusty environment
- Easy to install, easy maintenance

Application



Parking



Factory



Warehouse

Specification

Item Code	Item Description	Applicable lamps	Clip Material	MOQ (pcs)
543022006110	LED Waterproof-EP L600-2T-SG-GP	2pcs single-ended input LED T8 Tube(0.6m)	stainless steel	500
543022006010	LED Waterproof-EP L600-2T-DB-GP	2pcs double-ended input LED T8 Tube(0.6m)	stainless steel	500
543022005810	LED Waterproof-EP L1200-2T-SG-GP	2pcs single-ended input LED T8 Tube(1.2m)	stainless steel	3000
543022005610	LED Waterproof-EP L1200-2T-DB-GP	2pcs double-ended input LED T8 Tube(1.2m)	stainless steel	3000
543022005510	LED Waterproof-EP L1500-2T-SG-GP	2pcs single-ended input LED T8 Tube(1.5m)	stainless steel	504
543022005310	LED Waterproof-EP L1500-2T-DB-GP	2pcs double-ended input LED T8 Tube(1.5m)	stainless steel	504
543022005410	LED Waterproof-EP L600-2T-DB-GP-PC	2pcs double-ended input LED T8 Tube(0.6m)	Plastic	500
543022005710	LED Waterproof-EP L1200-2T-DB-GP-PC	2pcs double-ended input LED T8 Tube(1.2m)	Plastic	3000
543022005910	LED Waterproof-EP L1500-2T-SG-GP-PC	2pcs single-ended input LED T8 Tube(1.5m)	Plastic	504

Technical Specifications	
Housing Colour	Grey
IP	IP65
Glow wire test	650°C
Weight (kg/pc)	0.56-1.28

Mechanical Properties	
Housing Material	PC
Cover Material	PC


Electrical Supply	
Input Voltage (V)	100-240 (Follow rated input of LED T8)
AC / DC	AC

Application Conditions	
Operating Temperature	-30-45°C
Storage Environment	-30-65°C

Packaging Information


Item		Single Box(1pc/box)		Packaging Unit		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packaging Qty (pcs/unit)
543022006110	LED Waterproof-EP L600-2T-SG-GP	695x120x60	0.74	760x320x260	7.42	10
543022006010	LED Waterproof-EP L600-2T-DB-GP	695x120x60	0.73	760x320x260	7.32	10
543022005810	LED Waterproof-EP L1200-2T-SG-GP	1295x120x60	1.31	1360x260x260	10.50	8
543022005610	LED Waterproof-EP L1200-2T-DB-GP	1295x120x60	1.28	1360x260x260	10.26	8
543022005510	LED Waterproof-EP L1500-2T-SG-GP	1595x120x60	1.62	1660x260x260	12.95	8
543022005310	LED Waterproof-EP L1500-2T-DB-GP	1595x120x60	1.57	1660x260x260	12.55	8
543022005410	LED Waterproof-EP L600-2T-DB-GP-PC	695x120x60	0.72	760x320x260	7.22	10
543022005710	LED Waterproof-EP L1200-2T-DB-GP-PC	1290x82x61	1.24	1360x260x260	9.94	8
543022005910	LED Waterproof-EP L1500-2T-SG-GP-PC	1595x120x60	1.57	1660x260x260	12.55	8

Dimensional Drawing

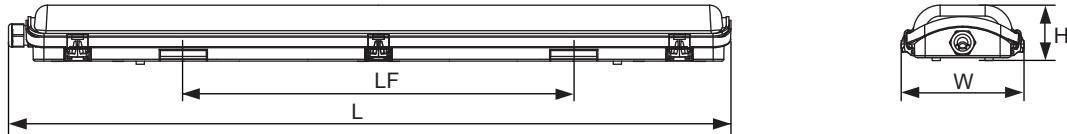

Model	L(mm)	W(mm)	H(mm)	LF(mm)
LED WP-EP 600-2T-S	688	116	56	370
LED WP-EP 600-2T-D	688	116	56	370
LED WP-EP 1200-2T-S	1288	116	56	860
LED WP-EP 1200-2T-D	1288	116	56	860
LED WP-EP 1500-2T-S	1588	116	56	1160
LED WP-EP 1500-2T-D	1588	116	56	1160

Photometric Data



OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com